




Wilo TWI 6.230

Stainless Steel Submersible Well Pumps

TWI 6.230

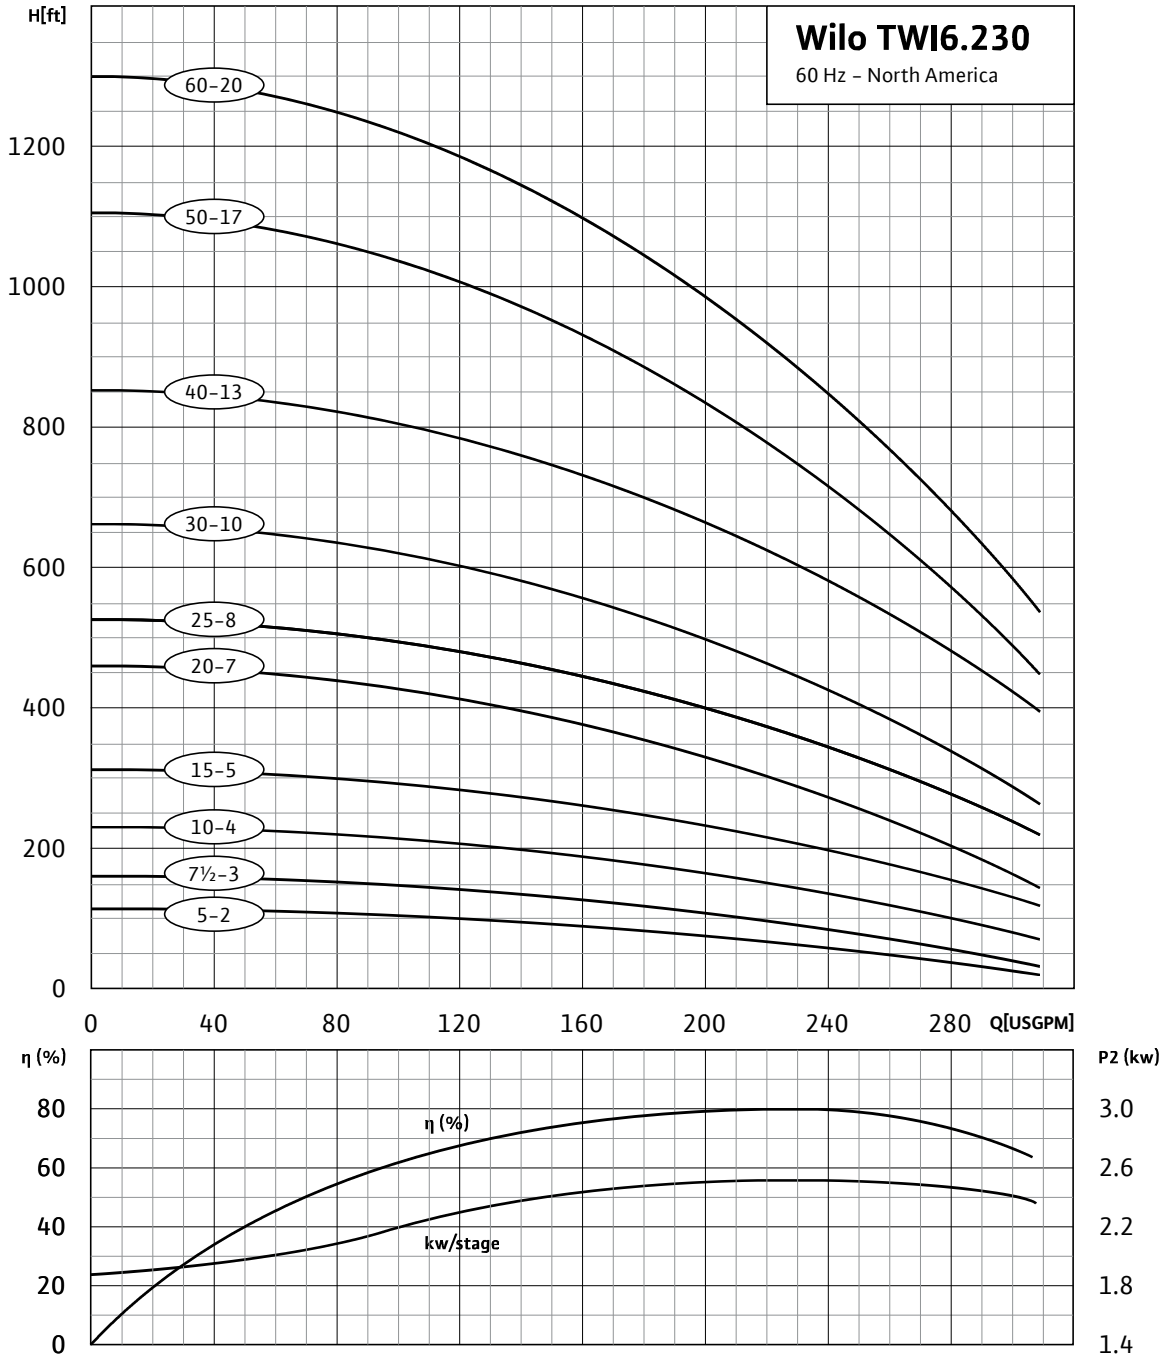

Wilo TWI 6.230

Stainless Steel Submersible Well Pumps



TWI 6.230

Weights and Dimensions													
Model	Min Well Dia (in)	Mtr. Size	HP	PH	Volts	Dimensions (in)					Weights (Lbs)		
						A	B	C	D	E	Complete Unit	Pump End	Motor
TWI6.230-2.50	6	M6	5	1	230	46.5	27.0	19.5	3" NPT	6	131	21	110
TWI6.230-2.50	6	M6	5	3	230	42.5	23.0	19.5			116	21	95
TWI6.230-2.50	6	M6	5	3	460	42.5	23.0	19.5			116	21	95
TWI6.230-3.75	6	M6	7½	1	230	50.9	27.0	23.9			154	26	128
TWI6.230-3.75	6	M6	7½	3	230	48.7	24.8	23.9			125	26	99
TWI6.230-3.75	6	M6	7½	3	460	48.7	24.8	23.9			125	26	99
TWI6.230-4.100	6	M6	10	1	230	55.4	27.0	28.4			158	30	128
TWI6.230-4.100	6	M6	10	3	230	55.4	27.0	28.4			140	30	110
TWI6.230-4.100	6	M6	10	3	460	55.4	27.0	28.4			140	30	110
TWI6.230-5.150	6	M6	15	1	230	66.4	33.5	32.9			184	36	148
TWI6.230-5.150	6	M6	15	3	230	62.8	29.9	32.9			164	36	128
TWI6.230-5.150	6	M6	15	3	460	62.8	29.9	32.9			164	36	128
TWI6.230-7.200	6	M6	20	3	230	73.3	31.5	41.8			183	46	137
TWI6.230-7.200	6	M6	20	3	460	73.3	31.5	41.8			183	46	137
TWI6.230-8.250	6	M6	25	3	230	82.4	36.2	46.2			212	51	161
TWI6.230-8.250	6	M6	25	3	460	82.4	36.2	46.2			212	51	161
TWI6.230-10.300	6	M6	30	3	230	93.3	38.2	55.1			238	62	176
TWI6.230-10.300	6	M6	30	3	460	93.3	38.2	55.1			238	62	176
TWI6.230-13.400	6	M6	40	3	460	109.1	40.6	68.5			264	77	187
TWI6.230-17.500	6	M6	50	3	460	128	41.7	86.3			298	98	200
TWI6.230-20.600	6	M6	60	3	460	141.3	41.7	99.6	315	115	200		

